


## DHI

Borrdjup = plugglængd + 1 cm  
10 mm borr anvænds. Alla mått i cm.

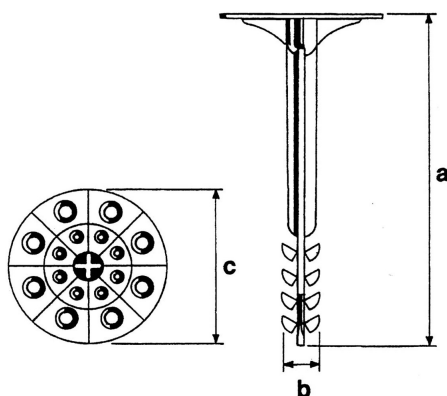

E.Nr	Typ	Færg	Isoleringstjocklek	L cm	Bor Ø mm	Packning
1500217	DHI 8	Grå	3-4 cm	8	10	225
1500218	DHI 10	Grå	4-6 cm	10	10	175
1500219	DHI 13	Grå	6-8 cm	13	10	150
1500220	DHI 15	Grå	8-10 cm	15	10	125
1500221	DHI 17	Grå	10-14 cm	17,5	10	75
1500468	DHI 25	Grå	15-20 cm	25	10	75
1500469	DHI 30	Grå	20-25 cm	30	10	75

Bordybde = Plugglængde + 1 cm  
10 mm bor benyttes.

### Teknisk info:

Utförd i UV-stabiliserad, halogenfri och korrosjonsfri Polyamid. -20 - +85°C. Dragkraft 40kg. Bor Ø 10mm.