


Speed Link 1,5 mm

Wireoppheng med karabinkrok og hurtiglås for diverse oppheng.

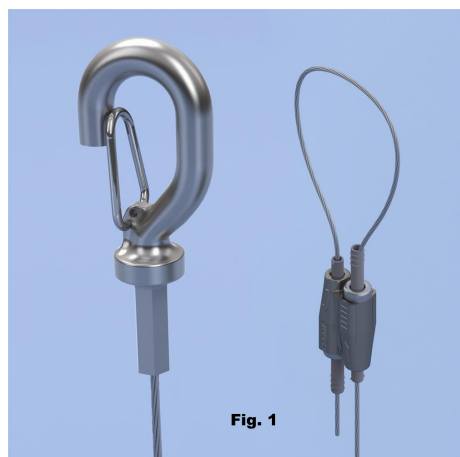

El. Røkning	Type	P	NS kg	Wire mm	Figur	L m
1320893	SLK15L1	1	20	1,5	1	1
Elforsinket156						
Elforsinket164						
1320894	SLK15L2	1	20	1,5	1	2
1320895	SLK15L3	1	20	1,5	1	3
1320896	SLK15L5	1	20	1,5	1	5
1320897	SLK15L10	1	20	1,5	1	10
Rustfritt stål204						
Rustfritt stål212						
1329619	SLD15L2S	2	20	1,5	2	2
1329620	SLD15L5S	2	20	1,5	2	5
1329621	SLD15L10S	2	20	1,5	2	10

*Se FDV dokument for korrosjonsbeskyttelse.

Teknisk info:

Utført i stål.

Korrosjonsbeskyttelse P1: Elektrolytisk forsinket 8-15 mikron. Egnet i ikke-korrosivt miljø.